



Instruction for Small Chair Back Covers for Lincoln Academy


1. Cut one piece of strong material such as (denim, stretch denim, duck cloth or trigger);
28" long and 20" wide



2. Fold fabric so that one edge is 3" longer than the other



3. Cut into a trapezoid with the following dimensions
Mark the center fold on the fabric

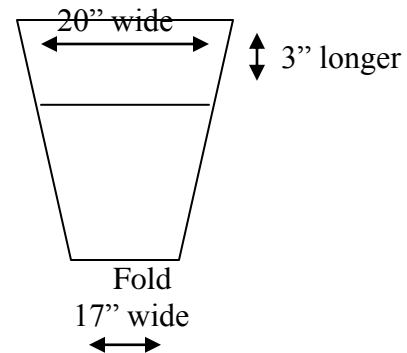

4. Out of remaining fabric or contrasting fabric cut
 - 1 square that is 13.5" by 13.5" (referred to as A)
 - 1 square that is 11.5" by 11.5" (referred to as B)
 - 1 square that is 9.5" by 9.5" (referred to as C)
5. Serge edges and fold over once and then top stitch on all 4 edges. OR Fold twice and top stitch on all 4 edges.
6. Attach C to the B.
 - Place C 1" from the bottom of the B. The C pocket needs to have slack when attached to the B pocket. Easy together the C pocket so that it actually

measures 9" at the bottom and 8" on the top as it is attached. Leave the top open.


7. Attach B to A.

- Place B 1" from the bottom of the A. The B pocket needs to have slack when attached to the A pocket. Easy together the B pocket so that it actually measures 11" at the bottom and 10" on the top as it is attached. Leave the top open.

8. Attach A to main piece of fabric on the longer side.

- Place A 1" from the bottom of the longer piece of fabric. The A pocket needs to have slack when attached to the fabric. Easy together the A pocket so that it actually measures 13" at the bottom and 12" on the top as it is attached. Leave the top open.

9. Hem bottom edges of the fabric

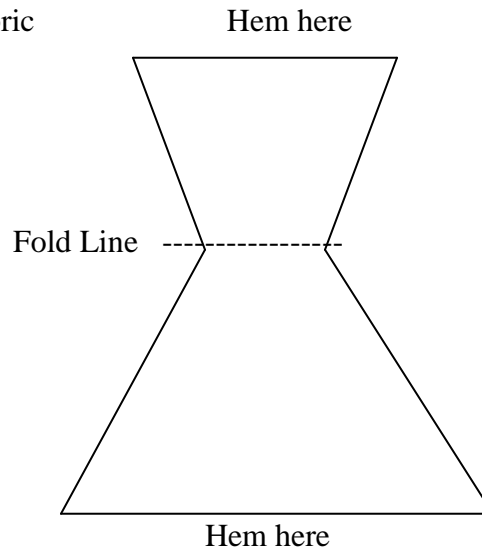

10. Fold the fabric with the pockets attached on the fold line you marked in step 2, right sides together.

11. Sew together at the side seams using .5" seams. Stop sewing 6" from the longer edge. Do not use a serger because we will reinforce the side seams to help prevent ripping of the chair cover later.

12. Press open the side seams and fold over the edges. There should only be .25" fabric showing on each side.

13. Stitch two rows of small stitches on both sides of the seam. Make sure you catch the fabric from the seam. At the bottom sew horizontally about .5" from the end

three times. This final stitching helps keep the ends together. Drawing of reinforced side seam.

